



WALK IN BATHS

5 Piece Roll In Shower: **Elite Brilliant** Drain: Center

Model # **EB 6036BF 5P .875C**



Made in Tennessee, USA

Elite Brilliant Accessories (page 2)

hansgrohe

Made in Germany



Made in Italy

Outside Dimensions: 60"L x 37"W x 78"H

Truck Load Factor: .80

Load Factor: 2.66

Net Weight: 452 lbs.

Threshold Height: 7/8" Change of Level*

Drain Configurations: Right, Left or Center

Color Options: White, Bone, Biscuit

Package Options:

- Standard (no fixtures)
- Deluxe (standard fixtures)
- Elite (premium fixtures in white, brilliant or satin)
- With or without integrated molded soap ledges

Panels:

Shower Base.....42" x 60"
Side Wall Panel Left.....74" x 40 1/4"
Side Wall Panel Right.....74" x 40 1/4"
Rear Wall Panel Bottom.....54 3/4" x 40 1/2"
Rear Wall Panel Top.....54 3/4" x 33 1/2"

Features:

- Premium marine grade gel-coat, five piece shower with 8" classic tile pattern.
- Plywood and steel reinforced walls for placing grab bars and seats anywhere (not dependent on stud locations).
- Easy shower wall assembly pin-lock system allowing front side installation.
- Precision fit wall panel seams (match into grout pattern).
- Grip-Sure(TM) floor texture.
- Self supporting, pre-leveled shower base (no mud set required).
- Shower door friendly (squared corners allow door installation).
- Ships pre-assembled, heavy duty crating protects product in transit.
- Available with or without integrated molded soap ledges

Note

*Change of level threshold has manageable 1/4" vertical rise to easily coordinate with minimum finished flooring.

Accessories:

- [12] Collapsible Rubber Dam White with End Caps
- [14] 2" Chrome Strainer, Brass Drain with Friction Seal
- [15] Kartri 66"x74" Heavy Weighted Shower Curtain

Hansgrohe

- [1] Hand Shower, Chroma E75 3 Jet
- [2] Vinyl Techniflex Hose
- [3] Wall Outlet Elbow in Chrome
- [4] Hand Shower Alternate Wall Mount in Chrome
- [7] HG Focus E Pressure Balance Valve
- [8] Interchangeable iBox Universal Plus

Ponte Giulio

- [5] Concealed Flange Straight Grab Bars (2) 36", 18" Brilliant Finish (Fine Polished Stainless Steel)
- [6] Ergonomic Hand Shower Holder ABS in Chrome
- [9] 4"x16" Folding Seat, Stainless Steel Support, ABS White/Chrome 380lb cap.
- [10] Folding Wall Grab Bar, Elbow Support 18" Polyethylene White/Chrome
- [11] Shower Curtain Rail Brilliant Finish (Fine Polished Stainless Steel)
- [13] Rectangular Stainless Steel Soap-Sponge Basket

Codes:

IPC, UPC, ANSI Z 124.2, NAHB, HUD, FHA

















Warranty:

30 Year Limited Warranty

For more information and specifications please visit www.ellasbubbles.com




Roll In Shower **Elite Brilliant** Accessories

1.  Chroma E75 Hand Shower - 3 Jet	2.  Vinyl Techniflex Hose	3.  Wall Outlet Elbow	4.  Hand Shower Alternate Wall Mount
5.  Stainless Steel Concealed Flange Straight Grab Bars	6.  Ergonomic Hand Shower Holder ABS in Chrome	7.  HG Focus E Pressure Balance Valve	8.  Interchangeable iBox Universal Plus for HG Focus E
9.  Folding Seat SS Support ABS White & Chrome	10.  Folding Grab Bar Elbow Support 18" ABS White & Chrome	11.  Straight Shower Curtain Rod Brilliant Finish	12.  Collapsible Rubber Dam White PVC with End Caps
13.  Rectangular Stainless Steel Soap-Sponge Basket	14.  2" Chrome Strainer Brass Drain with Friction Seal	15.  66" x 74" Heavy Weighted Shower Curtain	<div> hangrohe 1, 2, 3, 4, 7, 8 Made in Germany </div> <div>  PONTE GIULIO creating solutions 5, 6, 9, 10, 11, 12 Made in Italy </div>

For more information and specifications please visit www.ellasbubbles.com

Ella Roll In Shower
EB 6036 BF 5P .875 C

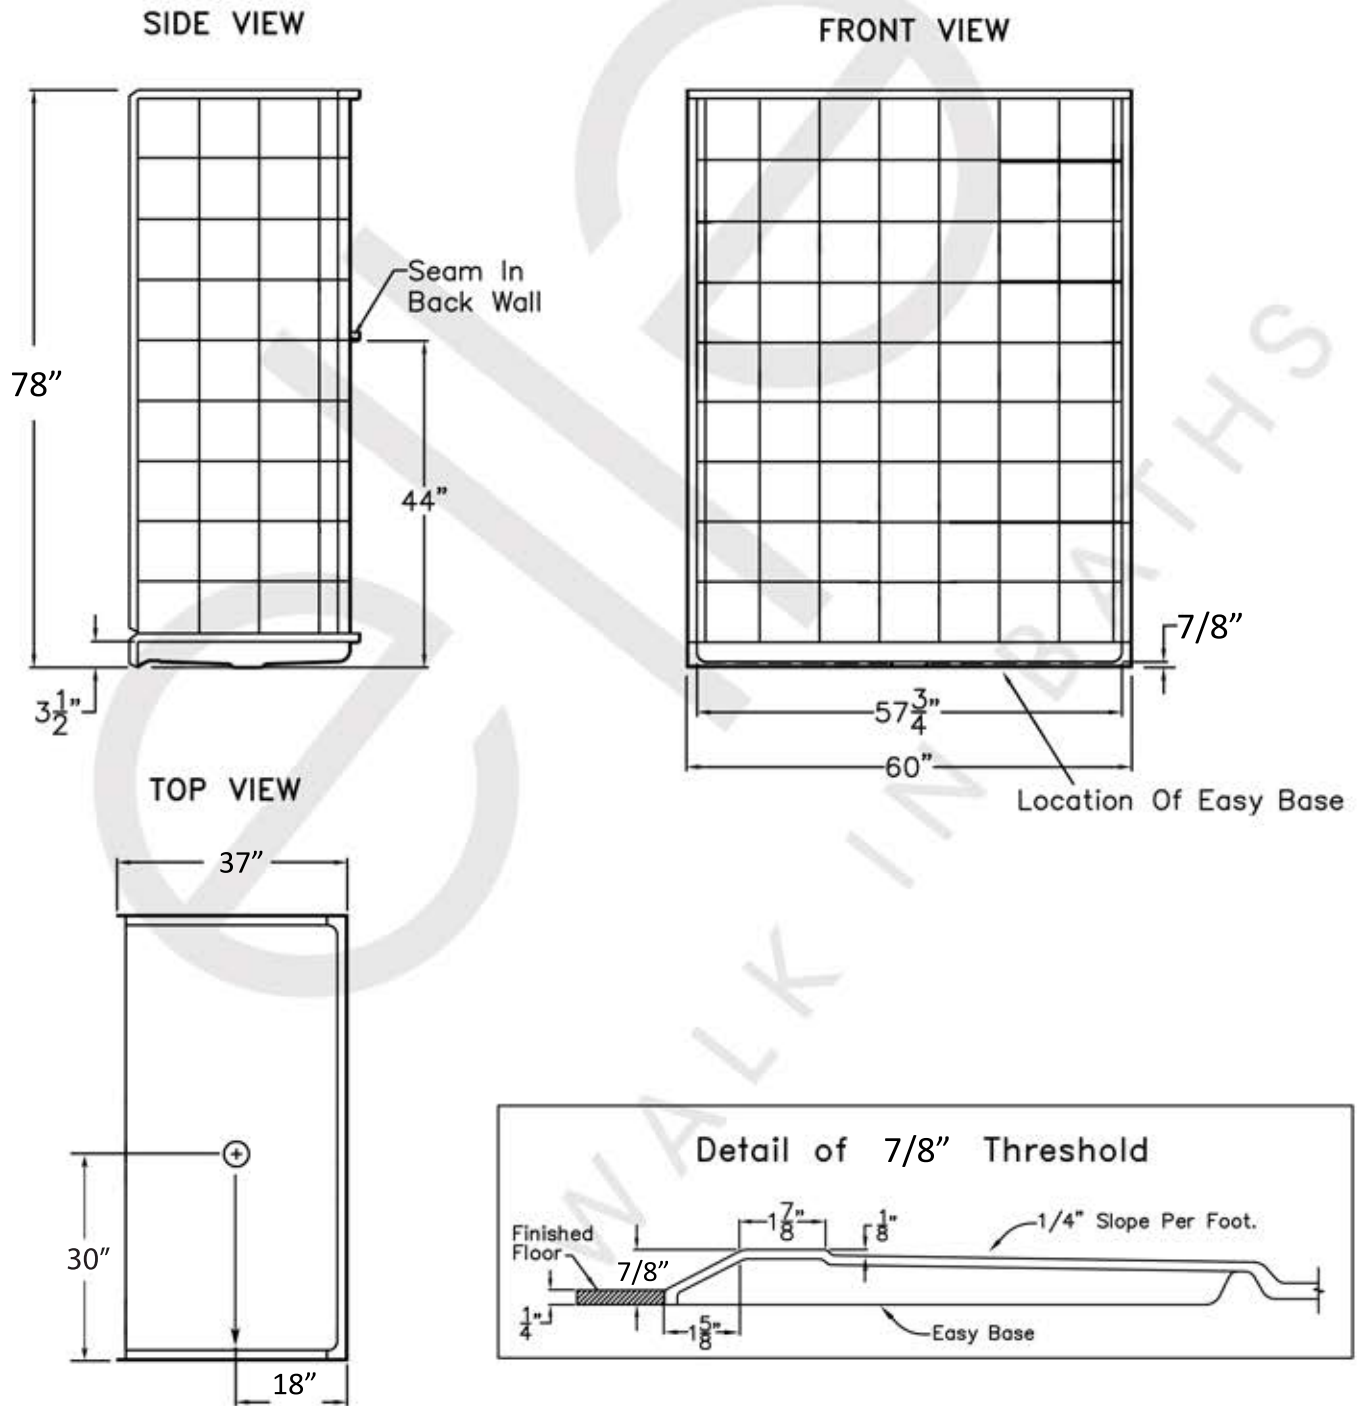



Roll In Shower Features


STRENGTH

Plywood & Steel Reinforced Walls

Twice the weight and twice the raw materials used in the construction of our showers than listed by any of our competitors.


Plywood reinforced core walls and high density base.

Metal conduit around perimeter of EACH panel for added strength.

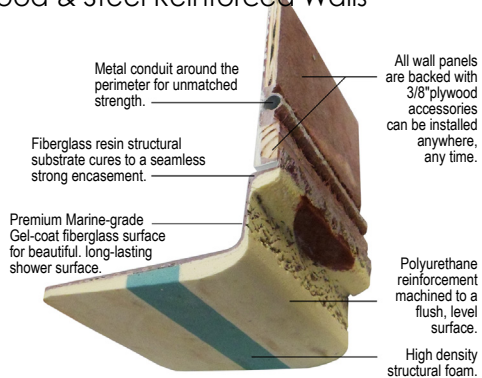

ADAPTABILITY

Customized Accessory Placement

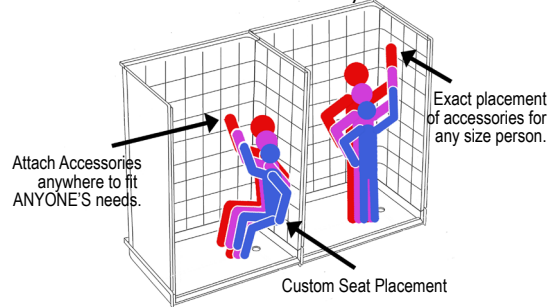


The plywood reinforced core walls allow the fixtures to be installed right onto the wall studs by eliminating the need for a drywall backing.

FRONT SIDE INSTALLATION




INTEGRAL SELF-LOCATING METAL GUIDE PINS



Aluminum Pin and Slot System for a contractor friendly front side installation.

An installation may be finished in a fraction of the time. No more need to get behind the panels to bolt large panels together.

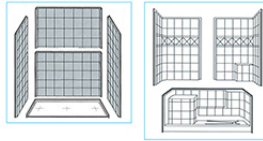

SHOWER DOOR FRIENDLY

Your choice: Curtain or Door



Square corners in Ella shower construction allow for framed or frameless shower doors to be installed.

Image for Illustration only

SMART PACKING

Multi-piece Shower in a Box



Heavy Duty Crating protects product in transit.

Each panel is individually packaged then labeled and banded.

Each package is crated vertically on a pallet.

This process allows for your shower to be delivered safely and un-crated in minutes.

AVAILABILITY

Your Project won't be held up



In stock for Rapid Ship


Ella showers are manufactured, inspected and shipped directly from the factory within 5 - 7 business days.

Rush orders are available upon request (white only).

No order is too big or small.

PRE-LEVELED BASE


Gelcoat fiberglass surface creates the smooth, beautiful, long-lasting shower surface

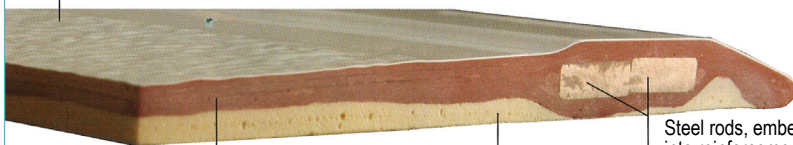

Fiberglass resin structural substrate cures to a seamless, strong encasement shell.

Polyurethane reinforcement, machined to a flush, level surface

Steel rods, embedded into reinforcement to strengthen threshold

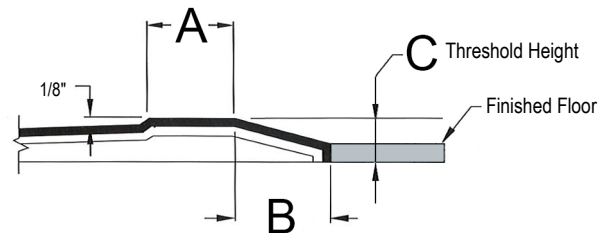

The barrier free threshold height (C) varies due to shower base sizes and floor drain location. The shower base is designed to assure the correct water flow into the floor drain. The threshold height size is located at the end of each shower model number.

Example: EB 6030 BF 5P .75 shows 0.75 of an inch C = 3/4" threshold height.